


Casambi CBU-A2D

Diffusion LED Controller

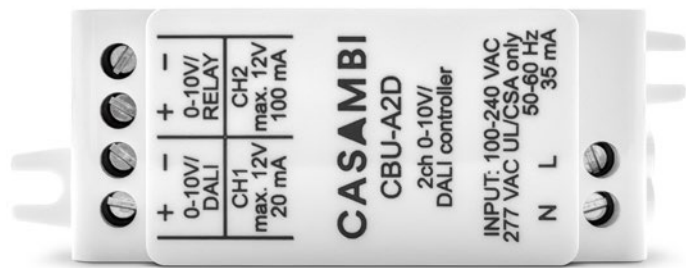

Description

CBU-A2D is a Bluetooth-enabled 2-channel 0-10V/DALI controller with a universal 100-277 VAC input voltage range. It can control 1-2 0-10V LED drivers or a tunable white LED driver with two 0-10V control interfaces.

Specifications

Power Input	24V DC
Voltage range	100-240 VAC (CE/UL/CSA)
Frequency	50-60 Hz
Max. mains current	35 mA
No-load standby power	< 0,5 W
Range	Indoors 30 m / Outdoors 50 m
Wire range	16-20 AWG
Wireless Connection	Bluetooth 4.0
IP Rating	IP 20
Environment	Indoor Only
Warranty	5 Year Warranty

Diagram

