

SLC-402S

Diffusion LED Channel



Safety Instruction and Warning

WARNING:

READ CAREFULLY BEFORE INSTALLING.

Installation should only be performed by a qualified electrician in accordance with NEC and all applicable local building codes.

Risk of fire or electric shock. Fixture installation requires knowledge of luminaire electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.


Ensure that electrical power is turned OFF before and during installation or maintenance.

Fixtures must be connected to a wiring system that includes an equipment-grounding conductor.

Ensure that the supply voltage matches the rated voltage of the luminaire fixture.

Wear gloves and safety glasses at all times when removing the luminaire from the carton, installing, servicing, or performing maintenance.


Diagram

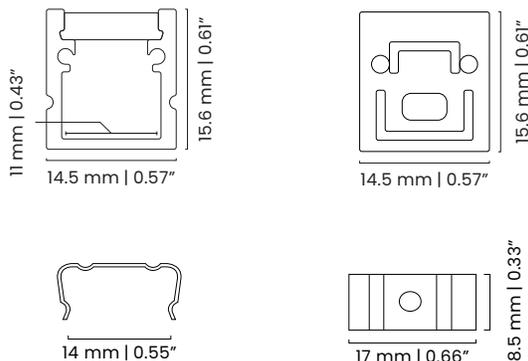

Description

Diffusion SLC-402S is a Narrow, anodized aluminum LED extrusion that comes complete with three mounting hardware, two endcaps, and an extra thick opal polycarbonate lens for zero dotting.

Shop Drawing

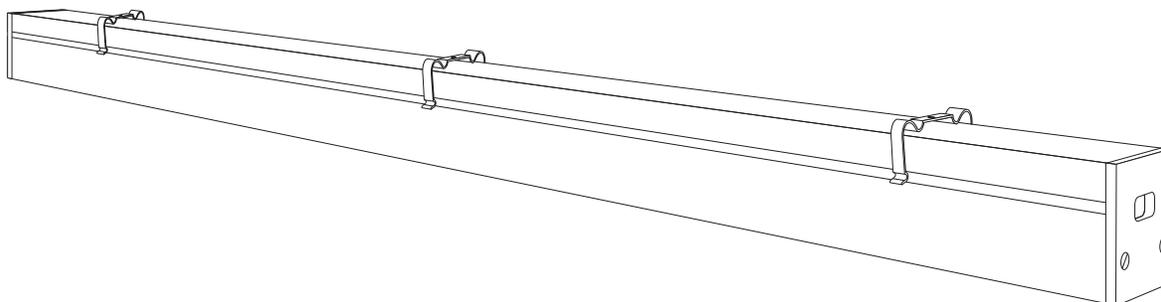


SLC-402S

Diffusion LED Channel



Installation Types

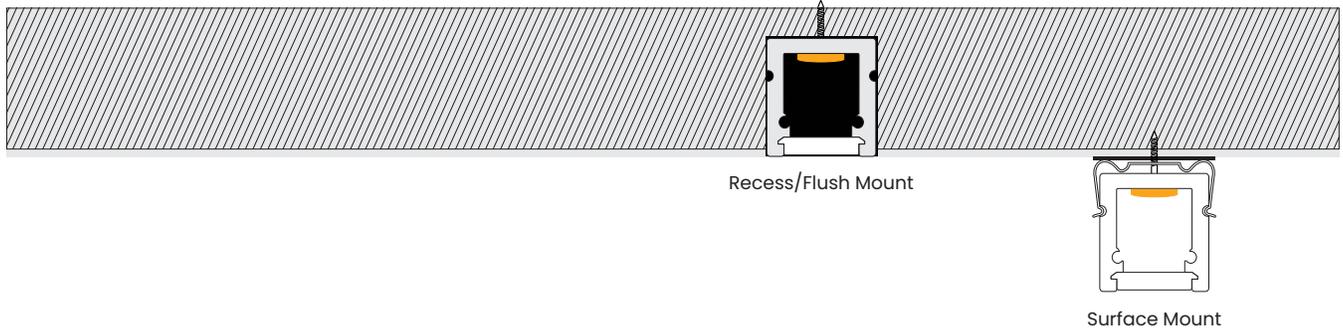

Notes:

Smaller surface mounted fixtures can be prebuilt before attaching to mounting clips for ease of installation if desired

Fixture should be built and installed based around the lengths of ribbon and power feed locations



Step 1

Instruction (Surface Mount, Less than 8ft)

Determine the desired length for your ribbon and channel.

For the best results, cut the channel and lens together to ensure they are aligned and equal in length.

For fixtures exceeding 8 feet in length, refer to page 5 for instructions.

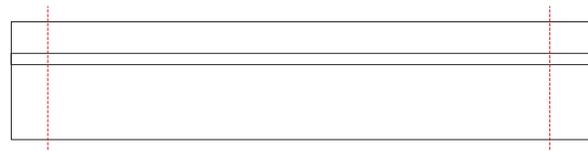


SLC-402S

Diffusion LED Channel



Step 2


Install mounting clips on the desired surface in a straight line. Ensuring straight lines using a laser, chalk line, or jig.

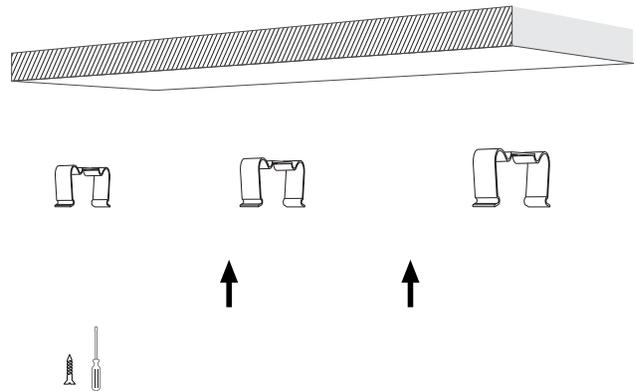

Step 3

Install ribbon using pre-cut pieces or adaptors, ensuring power feed is at the appropriate end. Peel off the 3M double-sided tape and stick it to the inside of the channel.

If using outdoor ribbon, use silicone or construction adhesive to adhere to the channel.

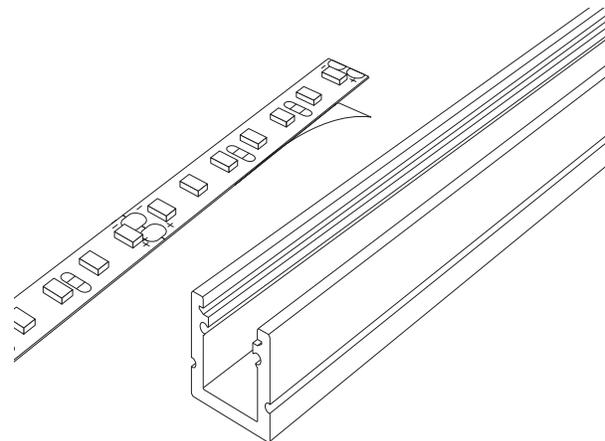


SLC-402S

Diffusion LED Channel

Step 4


Securely install the lens and endcaps, making sure they fit snugly and fully engage with the channel.

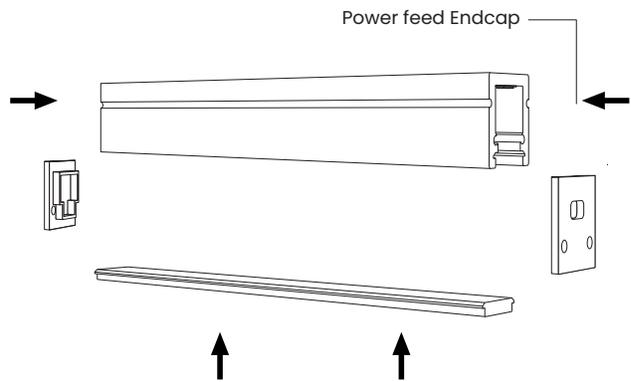

Step 5

Snap the finished fixture firmly into the mounting clips until it's securely seated

Finished!

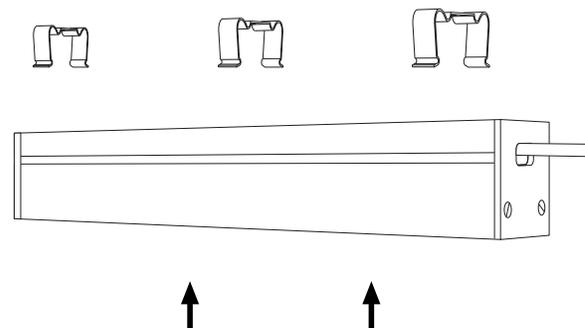

SLC-402S

Diffusion LED Channel




Step 1

Determine the desired length for your ribbon and channel.

For the best results, cut the channel and lens together to ensure they are aligned and equal in length.

If a corner is needed, cut angles into the ends of the channel (e.g., two 45-degree cuts to create a 90-degree turn).

Instruction (Recess/ Flush Mount, More than 8ft)

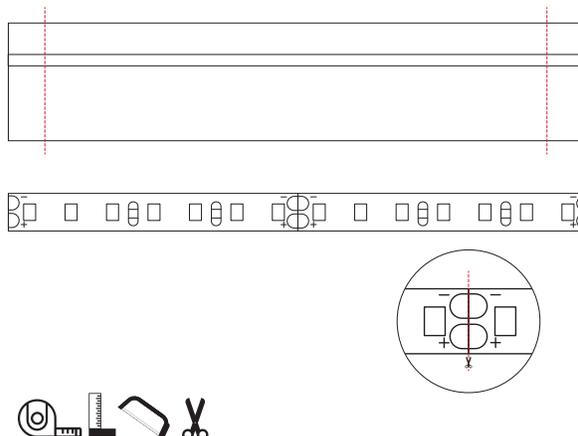


Step 2

For surface-mounted installations exceeding 8 feet, install mounting clips at a rate of three clips per 8-foot channel section. Position clips approximately 6 inches from each end of the channel, with the third clip centered between them (3.5 feet from each end clip). Use a laser, chalk line, or jig to ensure straight lines.

Install channel pieces, ensuring the entire run is straight and all seams, edges, and joints line up tightly.

Then, install the endcaps, making sure the power feed endcap is at the appropriate end.

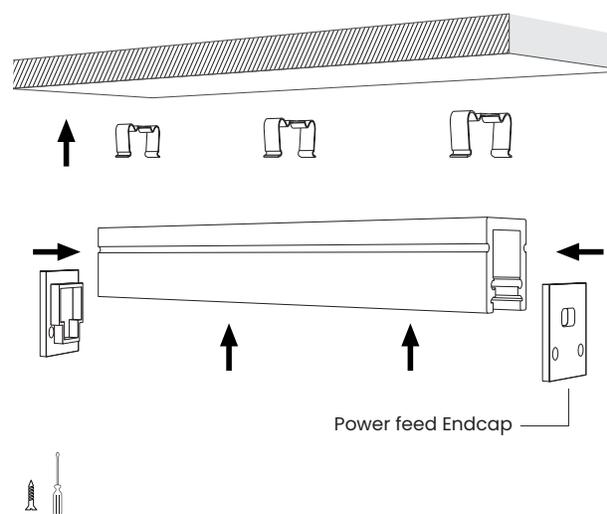

SLC-402S

Diffusion LED Channel




Step 3

For recessed or flush mount applications, secure the channel using either construction adhesive or by predrilling countersunk holes and fastening with appropriate screws.

If feeding power from the bottom of the fixture, drill a 7/32" (5.5mm) hole in the channel at the desired power connection point prior to installing the ribbon.


Install the channel, ensuring the entire run is straight and all seams, edges, and joints line up tightly. Then, install the endcaps, making sure the power feed endcap is at the appropriate end.

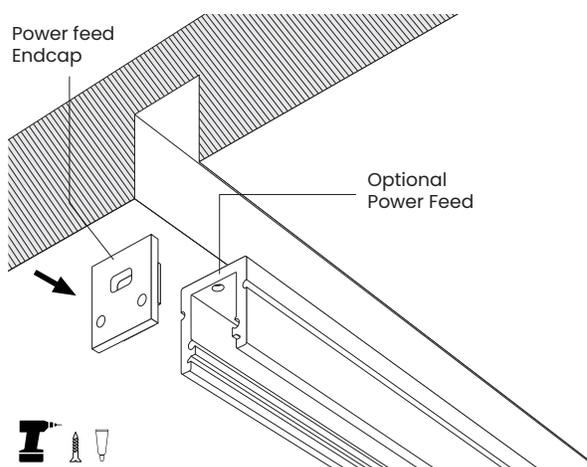

Step 4

Install ribbon using pre-cut pieces or adaptors, ensuring power feed is at the appropriate end. Peel off the 3M double-sided tape and stick it to the inside of the channel.

If using outdoor ribbon, use silicone or construction adhesive to adhere to the channel.

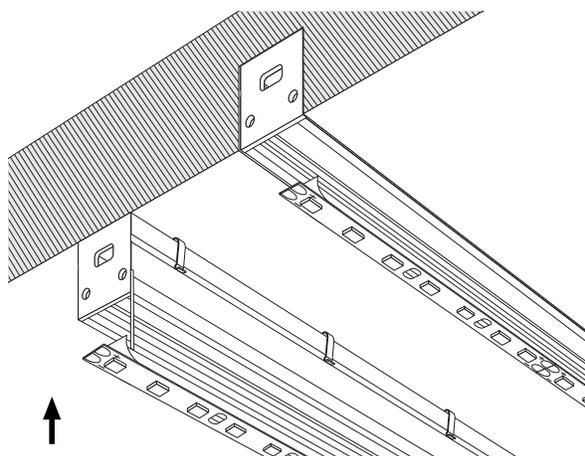

SLC-402S

Diffusion LED Channel



Step 5

Test the fixture to confirm proper operation. Once tested, carefully install the lens by snapping it into place, starting from one end and working down the length of the fixture.

Finished!

