

SL7.1 – Micron-Indoor Diffusion LED Ribbon



5W/M(1.5W/FT)
LED Watts

184/M(56/FT)
LED/Meter

95+
CRI

24V DC
Power Input



CUSTOM CUT ONLY

The Diffusion SL7.1 Micron Indoor is a flexible 5 mm wide linear LED strip. It is available in custom lengths and can be cut every 7 LED chips (38.5 mm/ 1.5")

Custom lengths available upon request

Lumens

2700K 403 lm/m (123 lm/ft)	3000K 433 lm/m (132 lm/ft)	3400K 466 lm/m (142 lm/ft)	4100K 500 lm/m (152 lm/ft)
----------------------------------	----------------------------------	----------------------------------	----------------------------------

Custom Kelvins available upon request




Specifications

Wattage	5 W/m (1.5 W/ft)	Max Run Length for Class 2	53 ft
Voltage	24 Volts DC	Max Run Length Product Limitation	16 ft
Roll Length	Custom Cut Only	Operating Temp	-40°C to 120°C
Dimmable	Yes	Cutting Point	1.5 in
Lamp Life	50,000 hrs LM-80	Adhesive	3M Double Coated
CRI	95 + CRI	Warranty	5 Year Warranty

Ordering Information


Ordering Code	Length	Voltage	Kelvin
SL7.1 – Micron – IN	XX CUSTOM CUT ONLY	24V	XX 2700K 3000K 3400K 4100K Custom Kelvins available upon request

Diagram

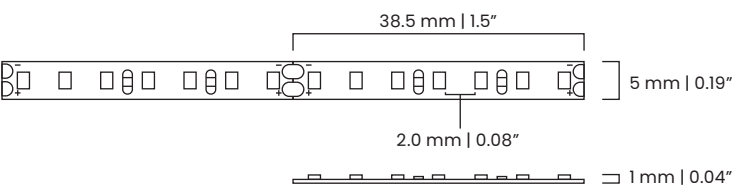

SL7.1 – Micron-Indoor Diffusion LED Ribbon

Common Pairings Channel

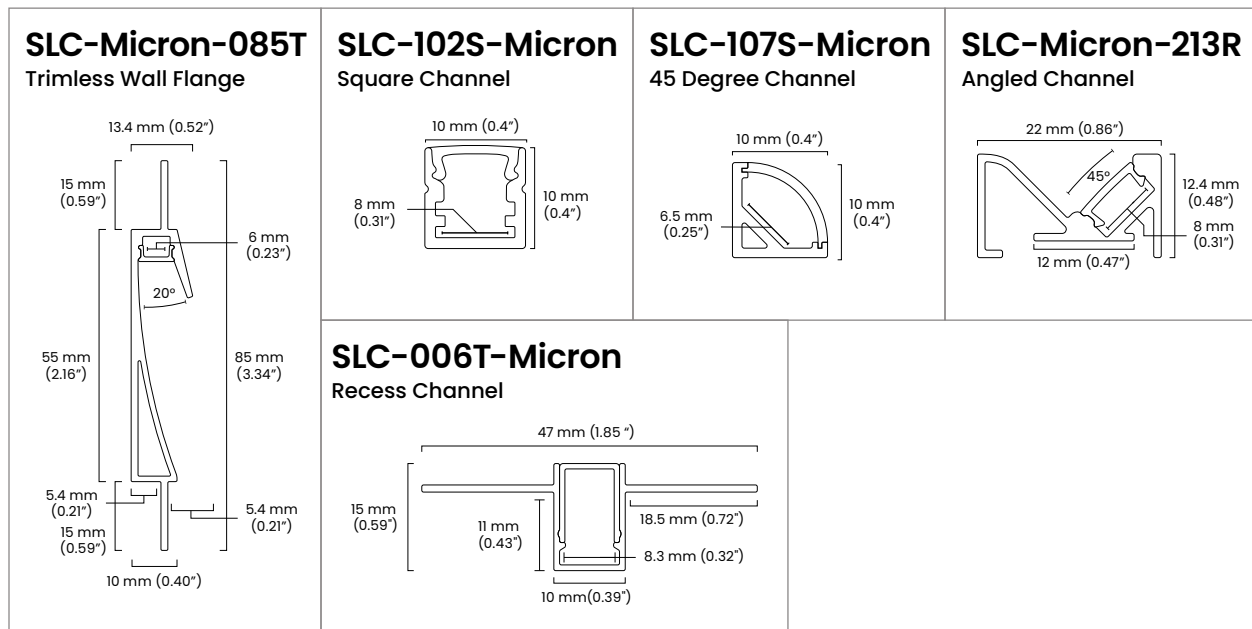

*More Channel options available online

All Aluminum LED channels can be cut on-site using a miter saw equipped with a circular blade designed for cutting aluminum.

LED channels are sold separately. Refer to their respective spec sheets for additional details

[Visit LED Channel Catalog](#)

SL7.1 – Micron-Indoor Diffusion LED Ribbon



LED Ribbon Wattage

5W/M(1.5W/FT)

LED Power Consumption

Residential

Total Watts Needed = (1.5 Watts Foot × Number of Feet) × 0.9

Commercial

Total Watts Needed = (1.5 Watts Foot × Number of Feet) × 0.8

Note: Maximum run length is 53' to stay in Class 2

Max distance of a driver is based on voltage loss calculation. Stay within 2% voltage loss

DLMULTI-024 Series Diffusion LED Driver

Specifications

Input Voltage	100-277 VAC	Environment	Indoor and Outdoor
Output Voltage	24V DC	Operating Temp	-40°C to 80°C
Dimming Range	0-100%	IP Rating	NEMA 4X
Dimmable	Yes	Warranty	5 Years

Product Title	Wattage	Output Current	Driver Dimension	Knock Outs
DLMULTI-024-30W Within Class 2	30W	1.25 A	165 mm L x 95 mm W x 26 mm H 6.49 in L x 3.75 in W x 1.02 in H	0.5 in (ID) Standard 1/2" won't fit Includes 2 Connectors
DLMULTI-024-60W Within Class 2	60W	2.5 A	188 mm L x 95 mm W x 26 mm H 7.40 in L x 3.75 in W x 1.02 in H	0.5 in (ID) Standard 1/2" won't fit Includes 2 Connectors
DLMULTI-024-100W Within Class 2	100W	4.16 A	220 mm L x 95 mm W x 41 mm H 8.66 in L x 3.75 in W x 1.61 in H	0.85 in (ID)
DLMULTI-024-150W Exceeds Class 2	150W	6.25 A	260 mm L x 104 mm W x 46 mm H 10.23 in L x 4.09 in W x 1.81 in H	0.85 in (ID)
DLMULTI-024-200W Exceeds Class 2	200W	8.33 A	260 mm L x 104 mm W x 46 mm H 10.23 in L x 4.09 in W x 1.81 in H	0.85 in (ID)
DLMULTI-024-300W Exceeds Class 2	300W	12.5 A	278 mm L x 110 mm W x 46 mm H 10.94 in L x 4.33 in W x 1.81 in H	0.85 in (ID)
DLMULTI-024-192W-2T Within Class 2	192W (2*96W)	2X 4.0 A	278 mm L x 110 mm W x 46 mm H 10.94 in L x 4.33 in W x 1.81 in H	0.85 in (ID)
DLMULTI-024-288W-3T Within Class 2	288W (3X 96W)	3X 4.0 A	303 mm L x 110 mm W x 46 mm H 11.93 in L x 4.33 in W x 1.81 in H	0.85 in (ID)
DLMULTI-024-384W-4T Within Class 2	384W (4X 96W)	4X 4.0 A	325 mm L x 140 mm W x 48 mm H 12.79 in L x 5.51 in W x 1.89 in H	0.85 in (ID)

Forward / Reverse Phase, ELV, TRIAC, or
0-10V Dimmers all in one LED Driver

