

# SLC-090T

## Diffusion LED Channel



### Safety Instruction and Warning

WARNING:

#### READ CAREFULLY BEFORE INSTALLING.

Installation should only be performed by a qualified electrician in accordance with NEC and all applicable local building codes.

Risk of fire or electric shock. Fixture installation requires knowledge of luminaire electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician.


Ensure that electrical power is turned OFF before and during installation or maintenance.

Fixtures must be connected to a wiring system that includes an equipment-grounding conductor.

Ensure that the supply voltage matches the rated voltage of the luminaire fixture.

Wear gloves and safety glasses at all times when removing the luminaire from the carton, installing, servicing, or performing maintenance.


### Diagram

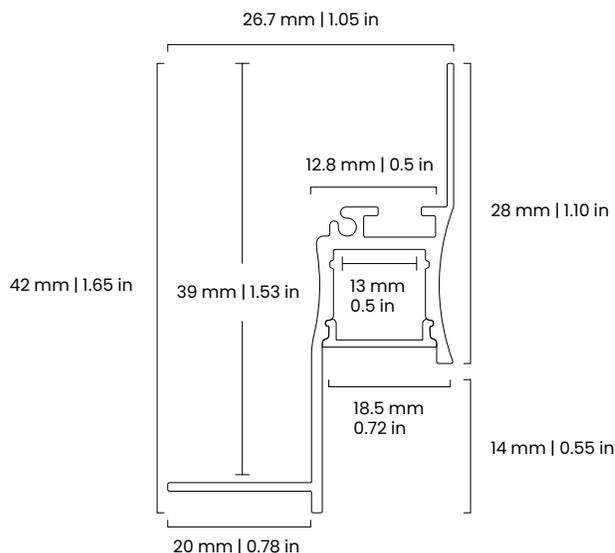

### Description

The SLC-090T Diffusion Trimless Wall Flange Channel is a trimless channel made of anodized aluminum, with an opal polycarbonate lens that comes complete with two endcaps.

### Shop Drawing

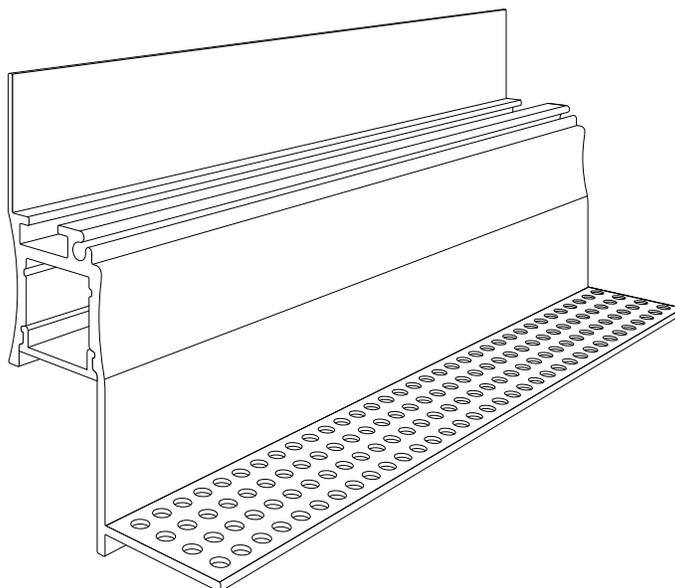

# SLC-090T

## Diffusion LED Channel




### Installation Types

**Notes:**

**\*\*If installing outside, seal the hole where the power feed exits fixture with silicone\*\***

**\*\*Fixture should be built and installed based on the lengths of ribbon and power feed locations\*\***

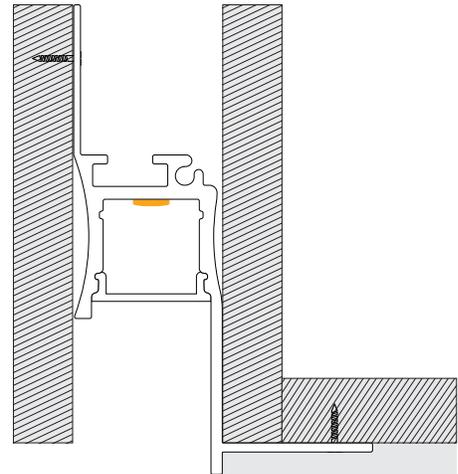



Recess/Flush Mount

### Step 1

Determine ribbon length and channel length, cutting to desired lengths as required.

You can cut the channel and lens at the same time to ensure they line up and are the same length.

Cut angles into ends of the channel if required. (Such as 45 degrees on two ends to make a 90-degree turn).

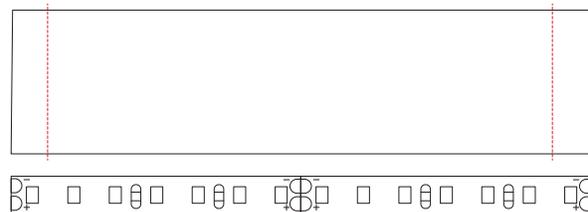


# SLC-090T

## Diffusion LED Channel



### Step 2


If feeding power from the other side of the fixture, drill a hole in the desired location prior to installation.

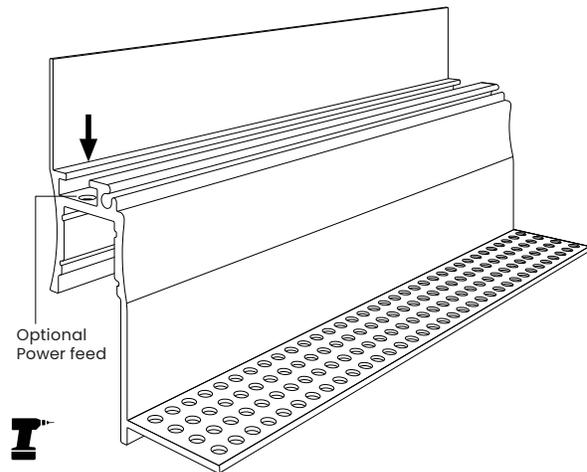

### Step 3

Install channel into drywall or wood recess, ensuring straight lines and proper length.

Don't forget a pull-string for power feed if required.

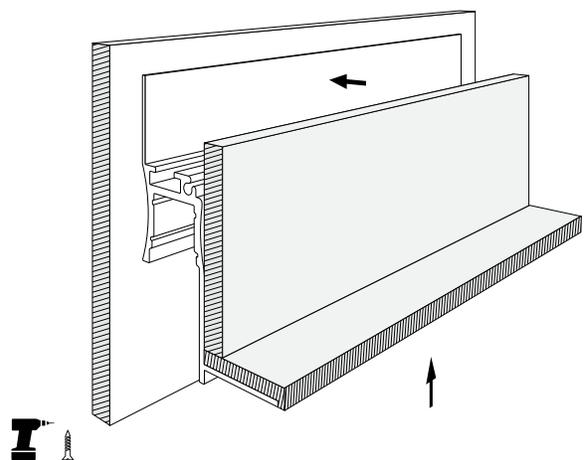


# SLC-090T

## Diffusion LED Channel



### Step 4


Finish trim with either drywall mud, veneer, or other options.

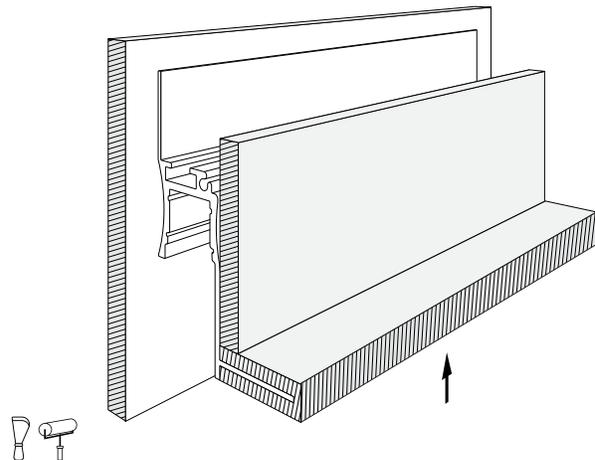

### Step 5

Install ribbon using pre-cut pieces and/or adaptors, ensuring the power feed is at the appropriate end. Peel off the 3M double-sided tape and stick to the inside of the channel.

If using outdoor ribbon, use silicone or construction adhesive to adhere to the channel.

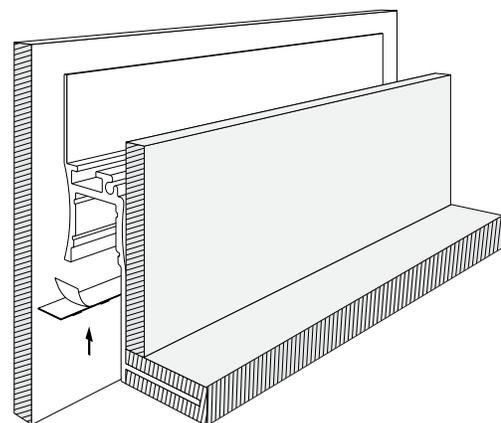

# SLC-090T

## Diffusion LED Channel

### Step 6

Test the fixture and install the lens by snapping it into place, starting at one end and working down the length of the fixture.

Finished!

